




THICK FILM MONITOR CRYSTALS

Frequency	4.000 – 10.000 MHz
Frequency Tolerance	± 10 PPM, ± 20 PPM, ± 50 PPM
Operating Temperature	-20° C to +70° C
Stability	± 5 PPM, ± 10 PPM
Equivalent Series Resistance ESR	< 40 Ohms
Plating	Chromium + Gold

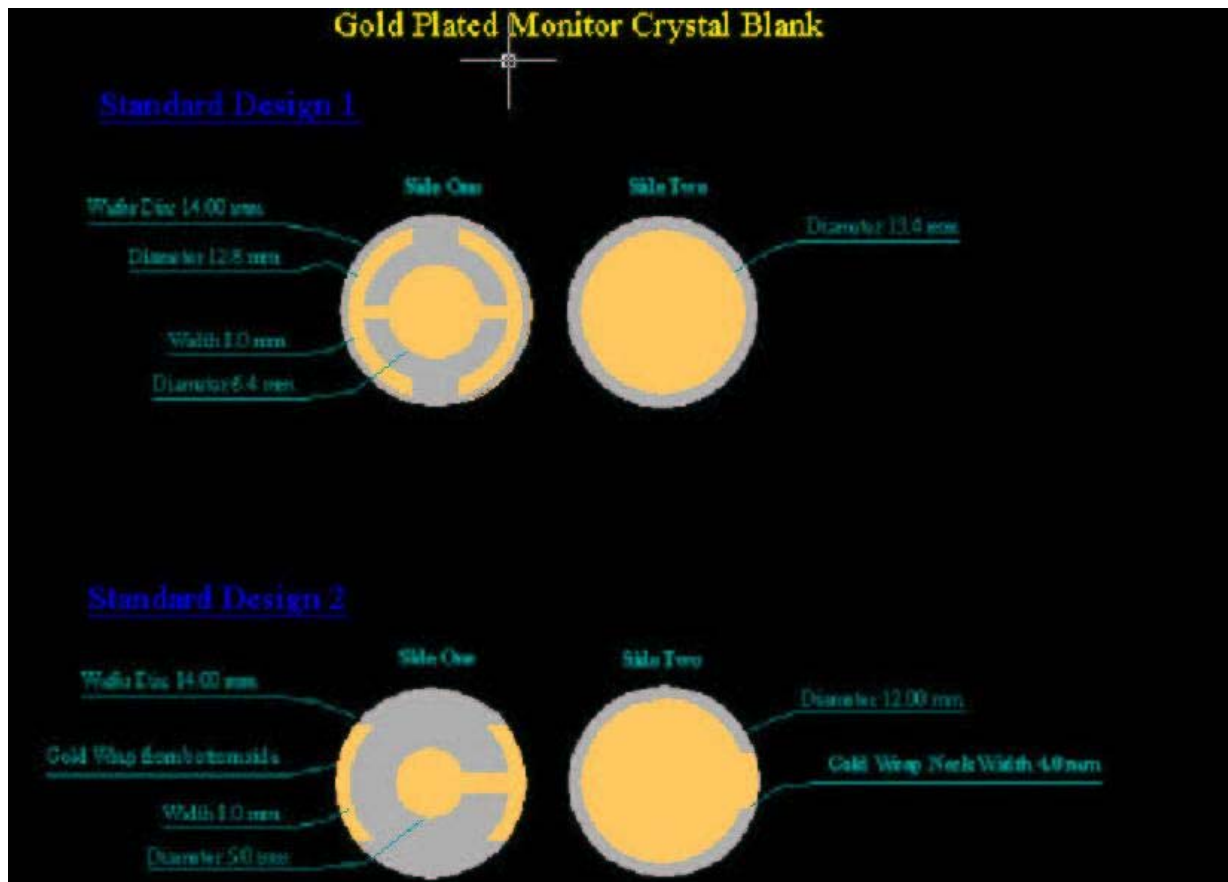

▲ All dimensions are in mm.

Specifications subject to change without notice
Revision No. 12a of December 2007

ANDHRA ELECTRONICS LIMITED

34 & 35, IDA, Kakinada, AP – 533 005,
INDIA.
URL: www.andhraelec.com

Phone: +91-884-2342203
Fax: +91-884-2341145
E-mail: info@andhraelec.com